
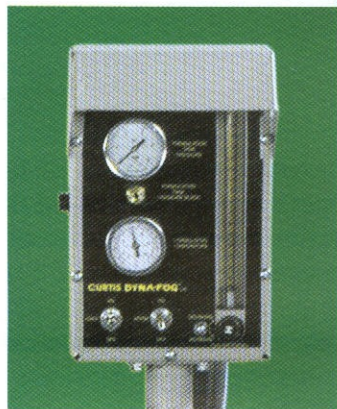


DYNA-FOG[®]

MAXI PRO™ 2P ULV

*User friendly with
High performance and
Reliability*

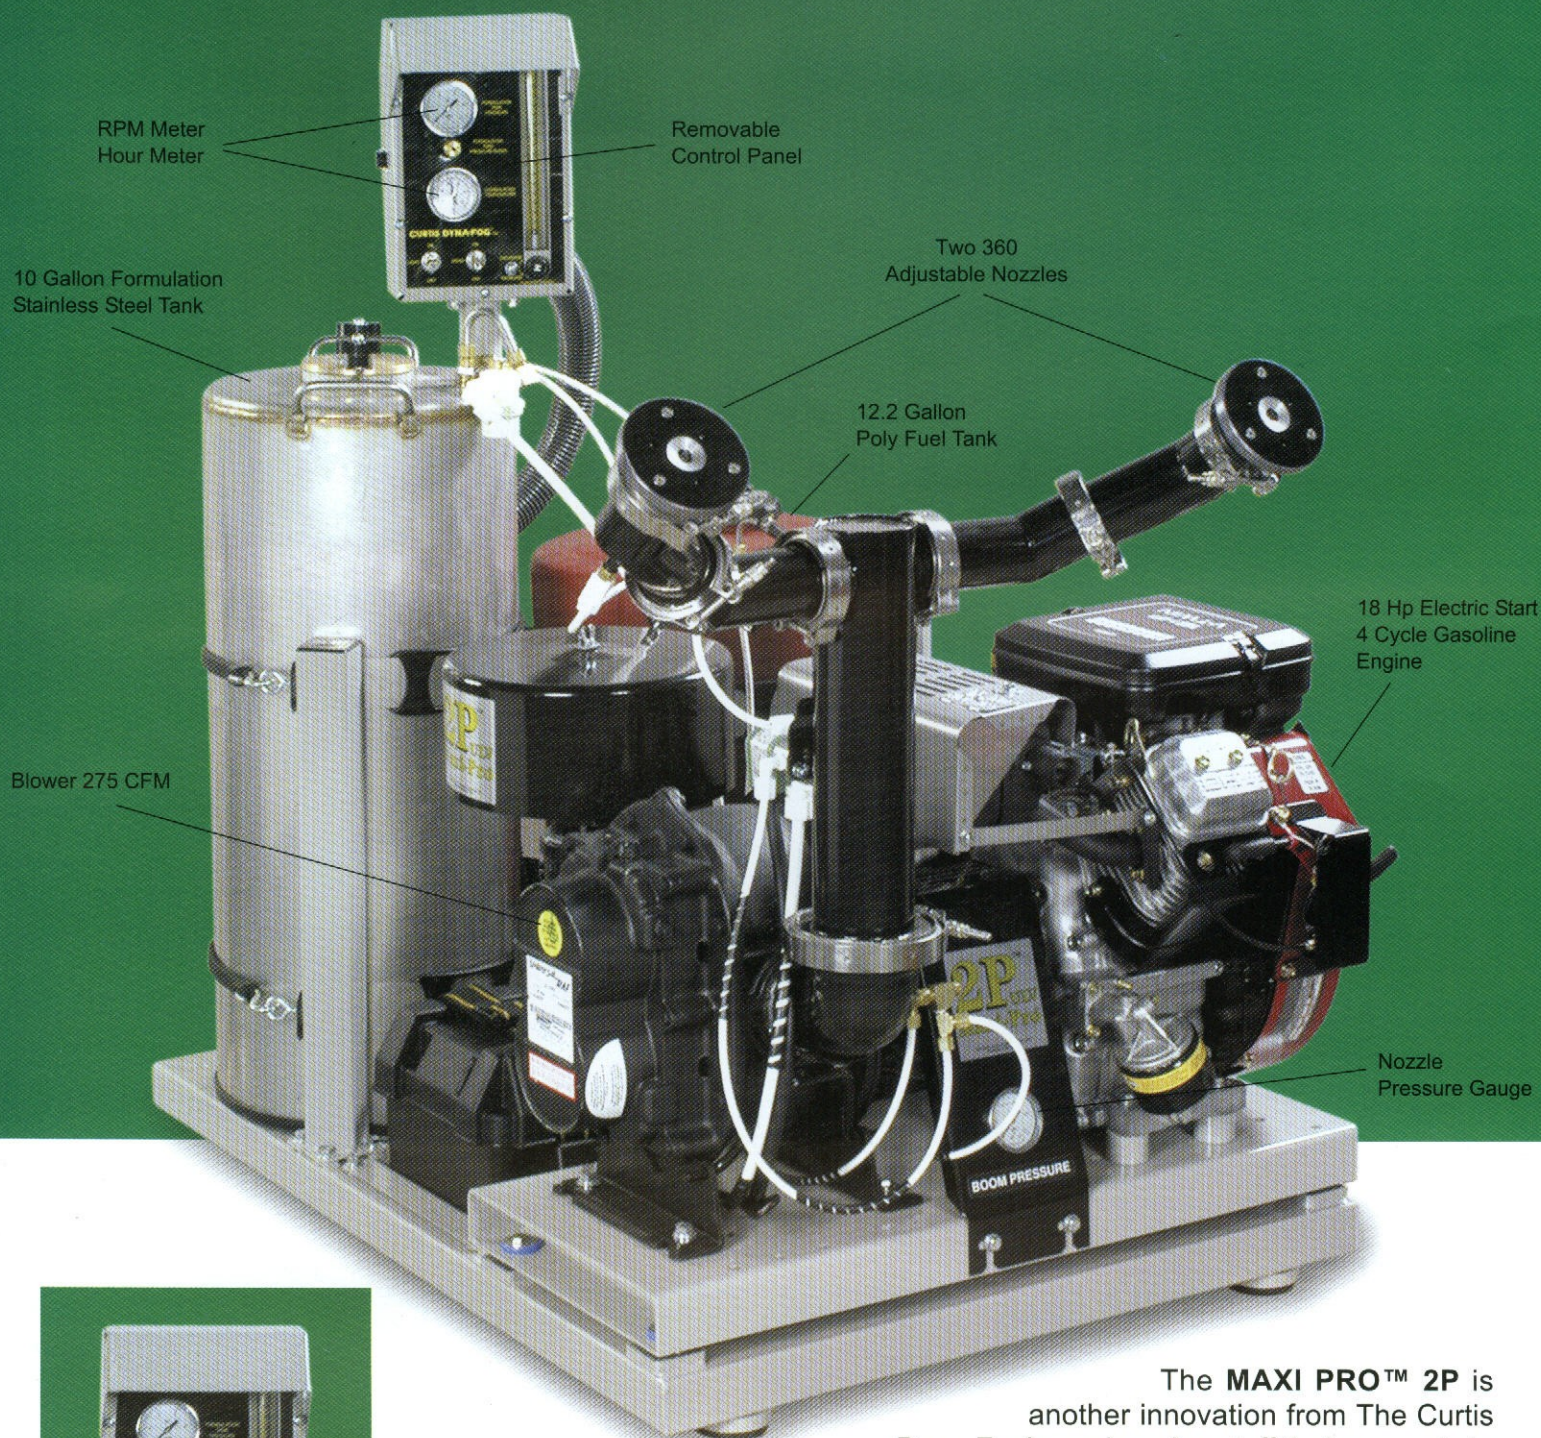

Lighted control panel includes
Oil Filled Pressure Gauge,
Temp. Gauge and Flowmeter

The **MAXI PRO™ 2P** is another innovation from The Curtis Dyna-Fog's engineering staff that responds to the needs of any insect and vector control program. Its reliable performance will provide years of continued use to any mosquito abatement district requiring the best equipment available.

The **MAXI PRO™ 2P** has a simple but accurate chemical metering control system that assures a high standard of efficiency with a minimum of effort.

CURTIS DYNA-FOG offers a complete and wide assortment of ULV, spray and fogging machines with over 20 models available to meet your requirements. Contact your nearest Dyna-Fog distributor for more information.

CURTIS **DYNA-FOG**® Ltd.



Optional Sewer Spraying Attachment Kit includes manhole cover plate, 25-foot hose and all necessary hardware.

Offers everything you need to fight mosquitoes that can transmit malaria, dengue and encephalitis.



The Hour Meter/Tachometer standard on all models provides digital display of engine RPM while engine is operating, and displays accumulative engine hours when engine off.



STANDARD FEATURES

- A more powerful 18 hp. air-cooled, twin cylinder that includes a charging system and electric starting.
- Air pressure gauge for monitoring nozzle air pressure.
- Air pressure gauge for monitoring formulation tank pressure.
- A completely directionally adjustable nozzle boom that allows complete freedom of spray direction.
- Direct drive blower eliminates the need for belts.
- Quieter operation due to large effective blower filter/silencer.
- Shock absorbing pads that help cut damaging vibration to an absolute minimum.
- No chemical flows through the vehicle cab.
- No special wiring needed for hook up.
- Welded tubular-steel frame.
- Remote formulation on/off control.
- Electric stainless steel solenoid valve.
- Digital hour/tachometer.
- Limited one year warranty.

OPTIONAL

- 12 - Volt Battery.
- 15 Gallon Poly Formulation Tank.
- Sewer Attachment Kit.

SPECIFICATION

Type	: ULV Chemical Aerosol Applicator
Engine	: Aluminium twin cylinder 4-cycle, gasoline, 18 hp. electric start with alternator.
Blower	: Direct drive, positive displacement rotary type. Air output 275 cu. ft./min. @ 8 PSI.
Nozzle system	: Boom type with 360° horizontal adjustment (azimuth) and 360° vertical adjustment (elevation) 2 nozzles.
Chemical system	: Pressured tank with Flowmeter Control. Adjustable output 0 to 40 oz. min
Tanks	: Formulation tank 10 Gallon Stainless Steel. Fuel Tank 12.2 Gallon Poly.
Particle size	: Meets all currently available chemical manufacturer's label requirements with 90% or more of droplets under 20 microns.
Weight Empty	: 408 lbs. (185 kg.)
Weight Filled	: 580 lbs. (262 kg.)
Length	: 44 in. (111.8 cm)
Width	: 37 in (94 cm)
Height	: 30 in (76 cm)
Mounting Base	
Frame	: 39 in. long x 30 in. wide (96,5 cm x 76,2 cm)
Shipping information (crated)	
	: L W H
	: 48.0" 39.5" 39.0"
Volume	: 42.9 cu. ft. (1.21 cu. meter)
Shipping Weight	: 540 lbs (245 kg)

Dyna-Fog is a registered trademark of Curtis Dyna-Fog Ltd.
MAXI-PRO is a trademark of Curtis Dyna-Fog Ltd.

CURTIS **DYNA-FOG**® Ltd.
INNOVATORS IN AEROSOL TECHNOLOGY

P.O. Box 297
17335 U.S. Highway 31 North
Westfield IN 46074-0297 U.S.A.
Ph. : 317-896-2561
Fax : 317-896-3788